



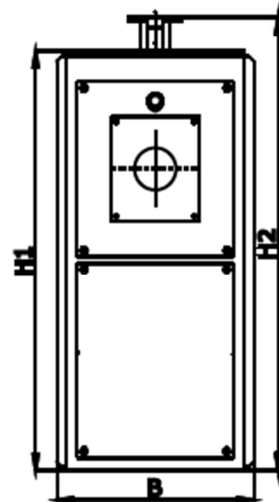

- Compact for good access
- Low fuel consumption
- Environmentally friendly
- Optimum three pass design
- Long life backed by good combustion
- Low NOx and SOx emissions

TİP/TYPE	TR C 175	TR C 230	TR C 290	TR C 350	TR C 465	TR C 625	TR C 810	TR C 1000	TR C 1250
Kapasite / Capacity (kW)	175	230	290	350	465	625	810	1000	1250
L (mm)	1690	1790	1940	2095	2215	2240	2640	2465	2865
L1 (mm)	1300	1400	1550	1700	1802	1801	2200	2000	2400
B (mm)	875	875	900	900	830	930	930	1010	1010
H1 (mm)	1250	1250	1300	1300	1595	1738	1738	1922	1922
H2 (mm)	1413	1413	1465	1465	1710	1850	1850	2037	2037
ØD (mm)	200	200	250	250	300	300	300	400	400
Kazan Gidiş/ Going	DN 80	DN 80	DN 100	DN 100	DN 100	DN 100	DN 125	DN 125	DN 150
Kazan Dönüş/ Return	DN 80	DN 80	DN 100	DN 100	DN 100	DN 100	DN 125	DN 125	DN 150
Emniyet Bağlantısı / Safety Valve	DN 40	DN 40	DN 50	DN 50	DN 50	DN 50	DN 65	DN 65	DN 80
Su Hacmi (lt.) / Water Volume	490	520	580	620	520	540	720	810	960

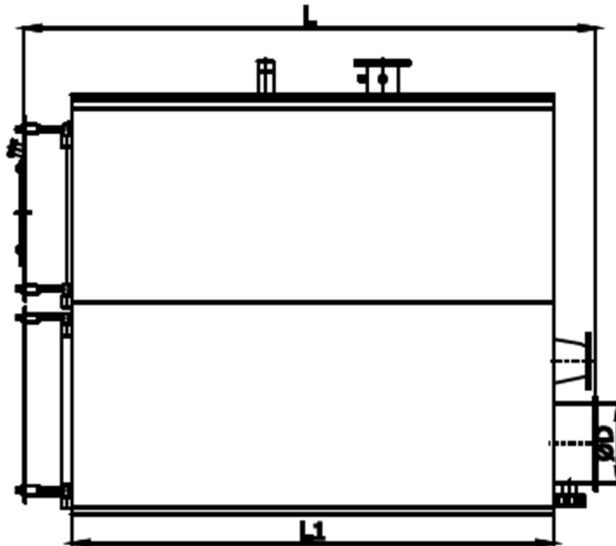

**TR C 465-1250**